


## PRESTON Wall Light


MLWL412PCMBK Matt Black

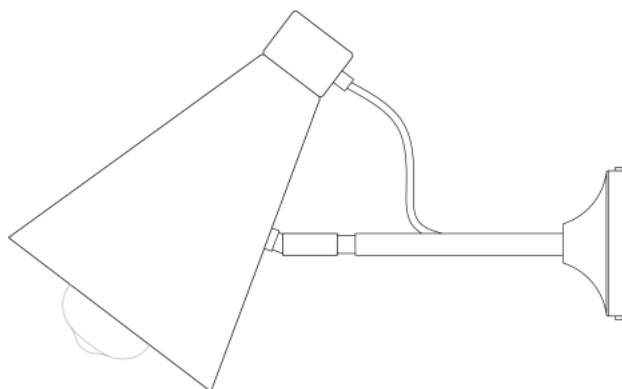

MATERIAL	Brass
HEIGHT	19cm   7.48"
WIDTH   DIAMETER	13.5cm   5.31"
LENGTH   PROJECTION	25-28cm   9.84-11.02"
WEIGHT	0.8KG   1.76lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA028   2 Core Round   Black Braid   PVC

### Fixing Bracket MLWB03 | Matt Black

\*For UL wired lights, fixing bracket may differ

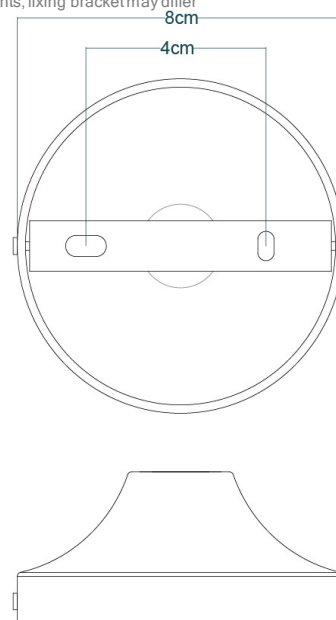


#### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

## PRESTON Wall Light


MLWL412PCWTE White

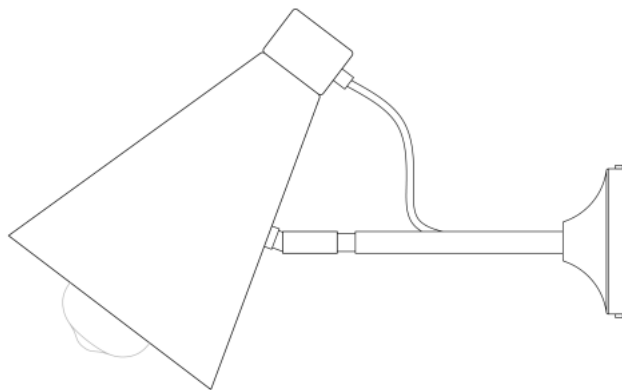

MATERIAL	Brass
HEIGHT	19cm   7.48"
WIDTH   DIAMETER	13.5cm   5.31"
LENGTH   PROJECTION	25-28cm   9.84-11.02"
WEIGHT	0.8KG   1.76lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA070   2 Core Round   White Braid   PVC

### Fixing Bracket MLWB03 | White

\*For UL wired lights, fixing bracket may differ

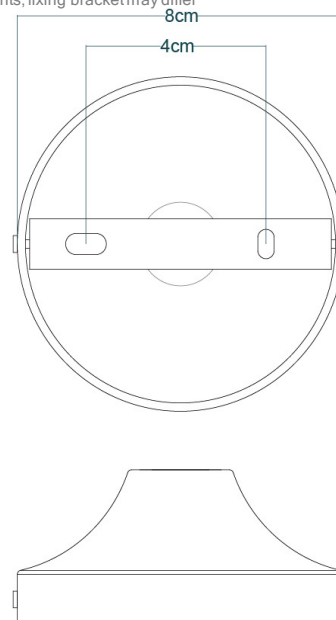

#### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.