


## YAOUNDE Wall Light

MLWL235ANTBRS    Antique Brass

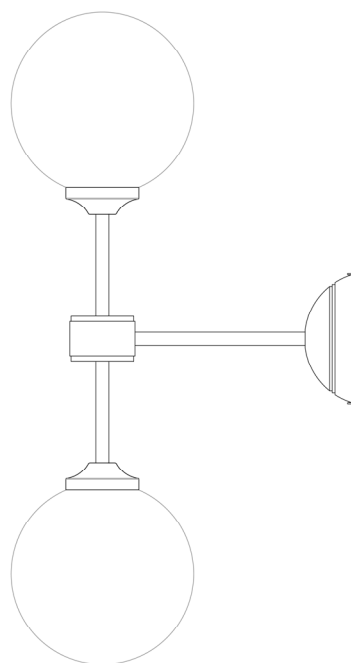

**MATERIAL**                      Brass | Glass

**HEIGHT**                        50cm | 19.69"

**WIDTH | DIAMETER**        14cm | 5.51"

**LENGTH | PROJECTION**    27.5cm | 10.83"

**WEIGHT**                        1.18KG | 2.6lbs

**LAMPHOLDER**                G9 x 2

**MAX WATTAGE**               6.5W x 2

**VOLTAGE**                       220/240v

**IP RATING**                      20


**CLASS PROTECTION**        I

**SHADE**                         GL044F x 2

**FLEX | BAR | CHAIN LENGT** n/a

**CABLE TYPE**                   -

**Fixing Bracket**    MLWB01 | Antique Brass

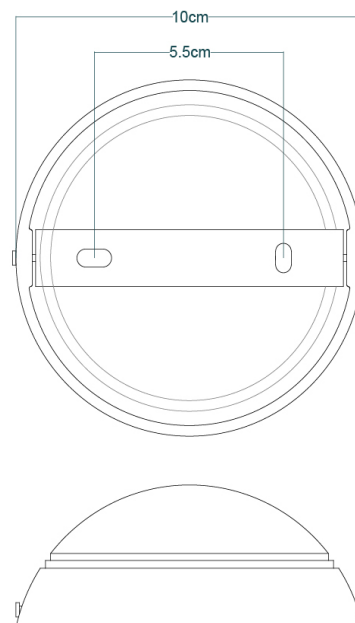


**Product Notes:**

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.



## YAOUNDE Wall Light

MLWL235ANTSLV Antique Silver

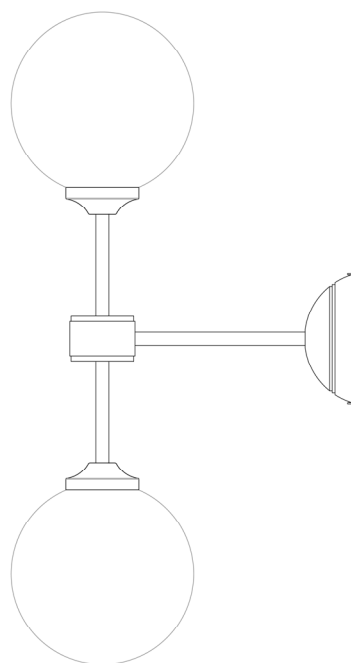

MATERIAL Brass | Glass

HEIGHT 50cm | 19.69"

WIDTH | DIAMETER 14cm | 5.51"

LENGTH | PROJECTION 27.5cm | 10.83"

WEIGHT 1.18KG | 2.6lbs

LAMPHOLDER G9 x 2

MAX WATTAGE 6.5W x 2

VOLTAGE 220/240v

IP RATING 20


CLASS PROTECTION I

SHADE GL044F x 2

FLEX | BAR | CHAIN LENGT n/a

CABLE TYPE -

Fixing Bracket MLWB01 | Antique Silver

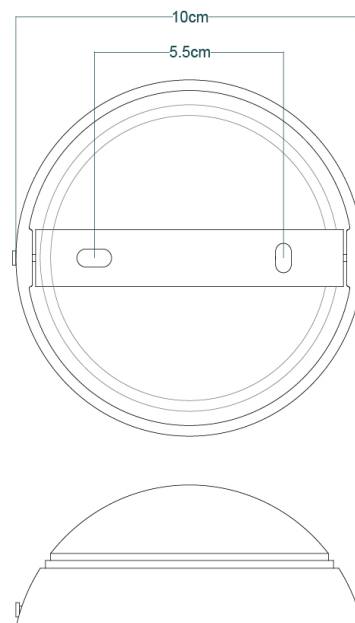

[www.mullanlighting.com](http://www.mullanlighting.com)

### Product Notes:


1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.






YAOUNDE Wall Light

MLWL235POLBRS Polished Brass

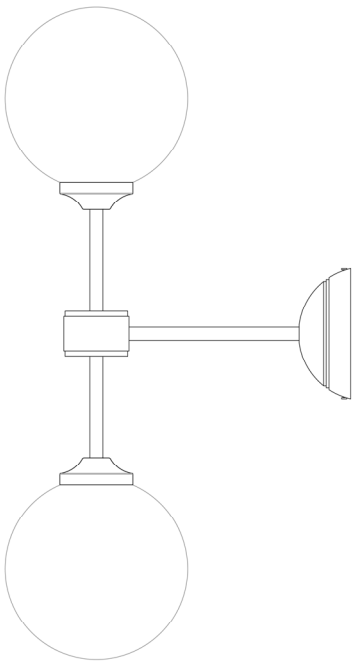

MATERIAL	Brass   Glass
HEIGHT	50cm   19.69"
WIDTH   DIAMETER	14cm   5.51"
LENGTH   PROJECTION	27.5cm   10.83"
WEIGHT	1.18KG   2.6lbs
LAMPHOLDER	G9 x 2
MAX WATTAGE	6.5W x 2
VOLTAGE	220/240v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL044F x 2
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB01 | Polished Brass

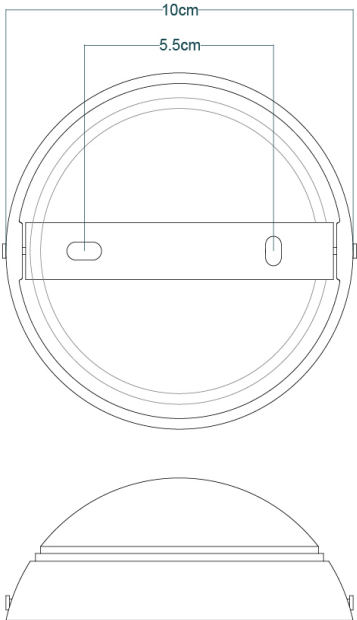


Product Notes:  
1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.




# YAOUNDE Wall Light

MLWL235SATBRS Satin Brass

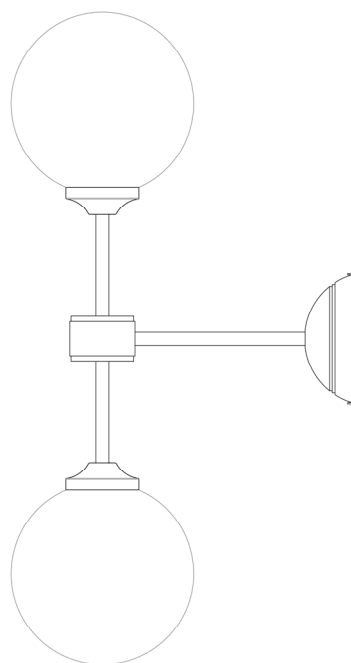

MATERIAL	Brass   Glass
HEIGHT	50cm   19.69"
WIDTH   DIAMETER	14cm   5.51"
LENGTH   PROJECTION	27.5cm   10.83"
WEIGHT	1.18KG   2.6lbs
LAMPHOLDER	G9 x 2
MAX WATTAGE	6.5W x 2
VOLTAGE	220/240v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL044F x 2
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB01 | Satin Brass

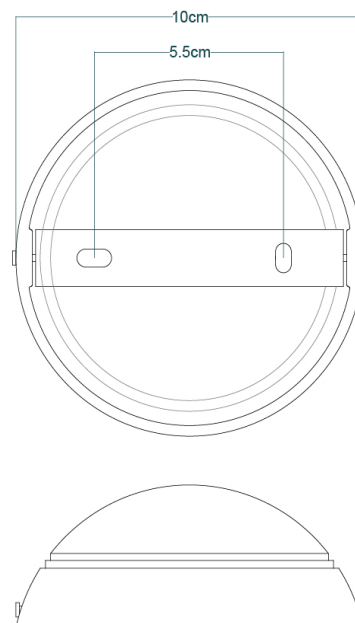

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.