




MATERIAL	Brass   Ceramic   Glass
HEIGHT	n/a
WIDTH   DIAMETER	21cm   8.27"
LENGTH   PROJECTION	9cm   3.54"
WEIGHT	1KG   2.2lbs
LAMP HOLDER	G9
MAX WATTAGE	6.5W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	44
CLASS PROTECTION	I
SHADE CODE	GL192   MLCS059
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

#### Fixing Bracket MLWB13

\* Fixing bracket may differ for UL wired products.

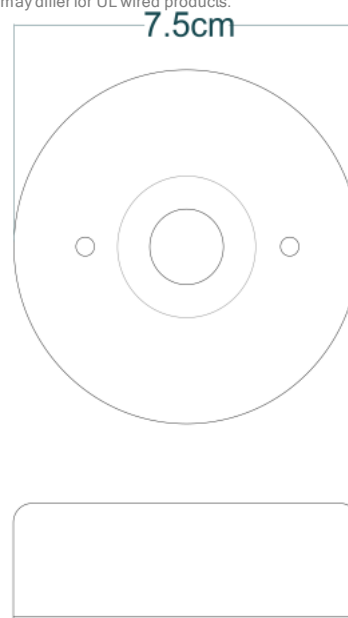

#### Product Notes:


1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.



MATERIAL	Brass   Ceramic   Glass
HEIGHT	n/a
WIDTH   DIAMETER	21cm   8.27"
LENGTH   PROJECTION	9cm   3.54"
WEIGHT	1KG   2.2lbs
LAMP HOLDER	G9
MAX WATTAGE	6.5W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	44
CLASS PROTECTION	I
SHADE CODE	GL192   MLCS059
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

#### Fixing Bracket MLWB13

\* Fixing bracket may differ for UL wired products.

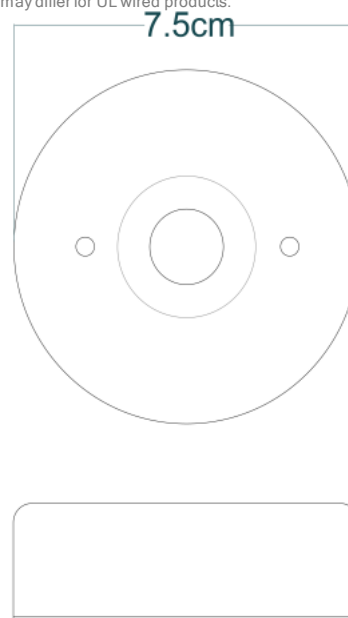

#### Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.



MATERIAL	Brass   Ceramic   Glass
HEIGHT	n/a
WIDTH   DIAMETER	21cm   8.27"
LENGTH   PROJECTION	9cm   3.54"
WEIGHT	1KG   2.2lbs
LAMP HOLDER	G9
MAX WATTAGE	6.5W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	44
CLASS PROTECTION	I
SHADE CODE	GL192   MLCS059
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB13

\* Fixing bracket may differ for UL wired products.






MATERIAL	Brass   Ceramic   Glass
HEIGHT	n/a
WIDTH   DIAMETER	21cm   8.27"
LENGTH   PROJECTION	9cm   3.54"
WEIGHT	1KG   2.2lbs
LAMP HOLDER	G9
MAX WATTAGE	6.5W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	44
CLASS PROTECTION	I
SHADE CODE	GL192   MLCS059
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

#### Fixing Bracket MLWB13

\* Fixing bracket may differ for UL wired products.

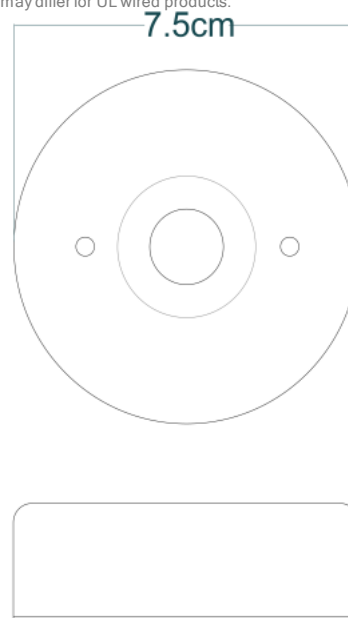

#### Product Notes:


1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.



MATERIAL	Brass   Ceramic   Glass
HEIGHT	n/a
WIDTH   DIAMETER	21cm   8.27"
LENGTH   PROJECTION	9cm   3.54"
WEIGHT	1KG   2.2lbs
LAMP HOLDER	G9
MAX WATTAGE	6.5W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	44
CLASS PROTECTION	I
SHADE CODE	GL192   MLCS059
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

#### Fixing Bracket MLWB13

\* Fixing bracket may differ for UL wired products.

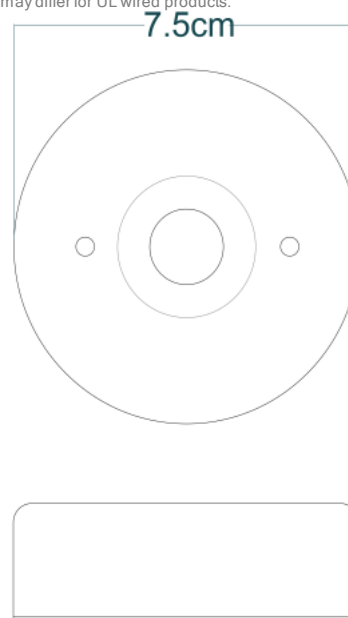

#### Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.