


# BURNABY Wall Light

MLWL506PCBRZ Bronze

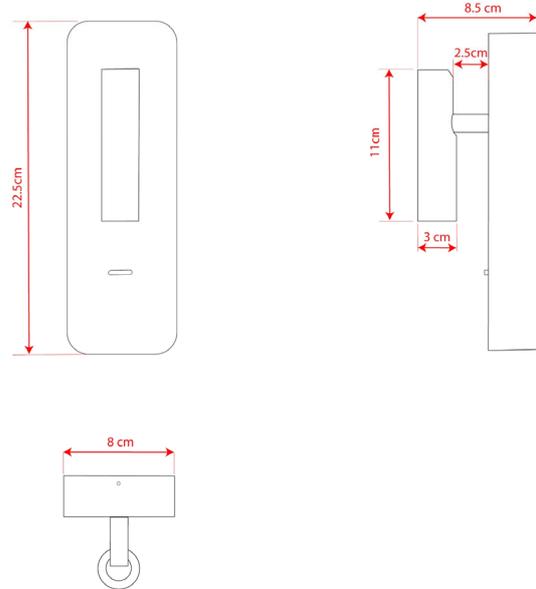


MATERIAL	Aluminium   Glass
HEIGHT	22.5cm   8.86"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	8.5cm   3.35"
WEIGHT	0.58KG   1.28lbs
LAMP HOLDER	Integrated
MAX WATTAGE	3W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

### Fixing Bracket -

\* Fixing bracket may differ for UL wired products.

#### Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

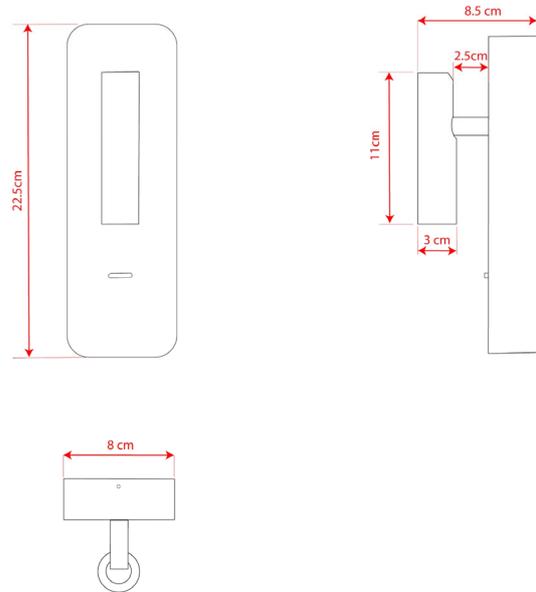

MATERIAL	Aluminium   Glass
HEIGHT	22.5cm   8.86"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	8.5cm   3.35"
WEIGHT	0.58KG   1.28lbs
LAMP HOLDER	Integrated
MAX WATTAGE	3W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	-

### Fixing Bracket -

\* Fixing bracket may differ for UL wired products.

### Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.