


RIGALE Ceiling Light


MLCF15ANTBRS Antique Brass

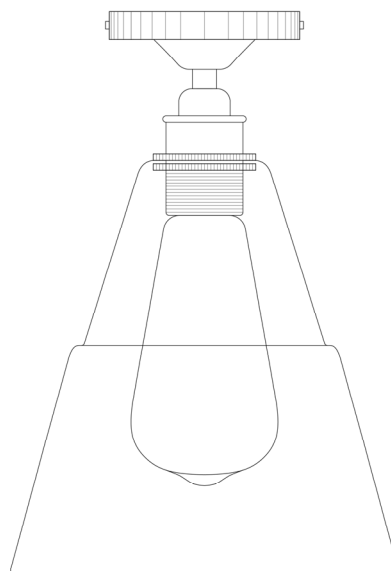

MATERIAL	Brass Glass
HEIGHT	23cm 9.06"
WIDTH DIAMETER	18cm 7.09"
LENGTH PROJECTION	n/a
WEIGHT	0.7KG 1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	GL146
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB02 | Antique Brass

* Fixing bracket may differ for UL wired products.

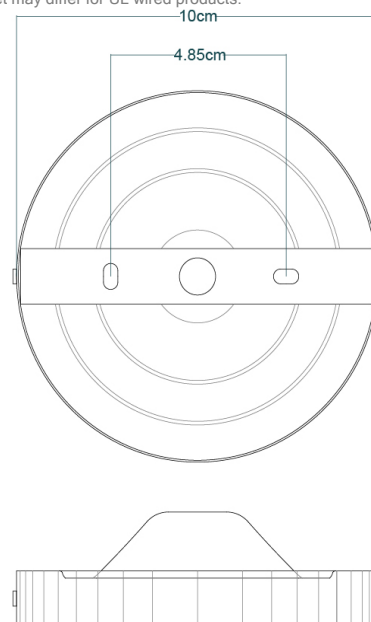


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

RIGALE Ceiling Light


MLCF15ANTSLV Antique Silver

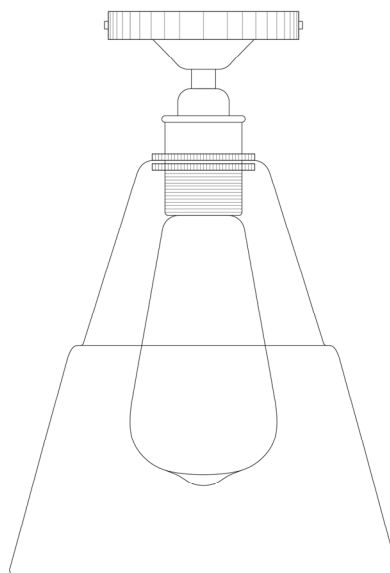

MATERIAL	Brass Glass
HEIGHT	23cm 9.06"
WIDTH DIAMETER	18cm 7.09"
LENGTH PROJECTION	n/a
WEIGHT	0.7KG 1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	GL146
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB02 | Antique Silver

* Fixing bracket may differ for UL wired products.

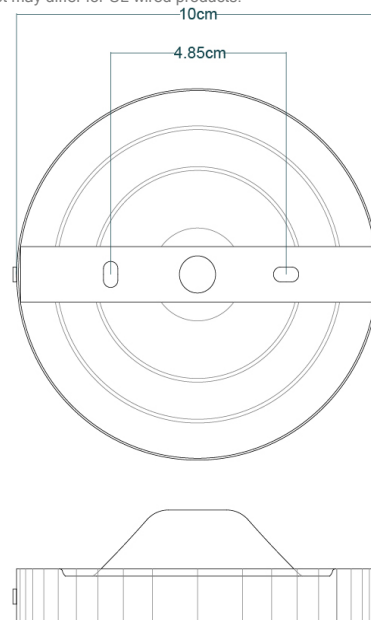


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

RIGALE Ceiling Light


MLCF15POLBRS Polished Brass

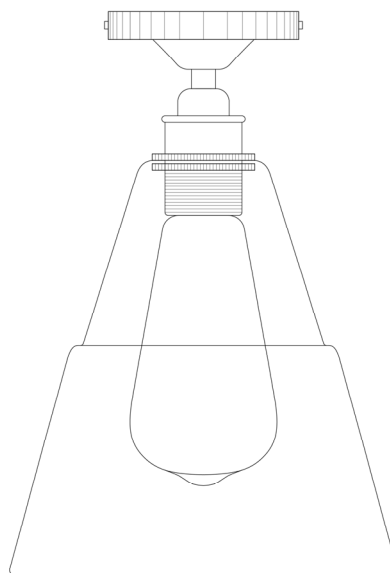

MATERIAL	Brass Glass
HEIGHT	23cm 9.06"
WIDTH DIAMETER	18cm 7.09"
LENGTH PROJECTION	n/a
WEIGHT	0.7KG 1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	GL146
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB02 | Polished Brass

* Fixing bracket may differ for UL wired products.

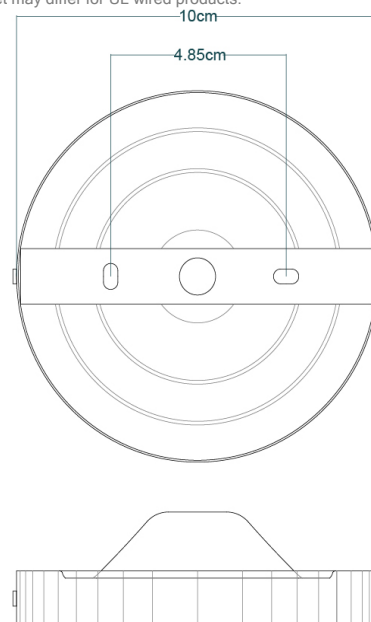


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

RIGALE Ceiling Light

MLCF15POLCHR Polished Chrome

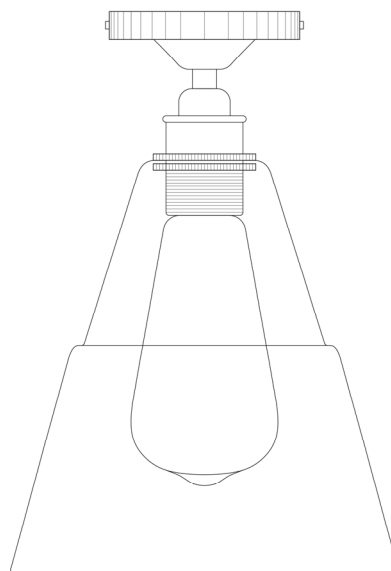

MATERIAL Brass | Glass

HEIGHT 23cm | 9.06"

WIDTH | DIAMETER 18cm | 7.09"

LENGTH | PROJECTION n/a

WEIGHT 0.7KG | 1.54lbs

LAMP HOLDER E27 or E26 *

MAX WATTAGE 40W x 1

VOLTAGE 220/240v or 110/120v *

IP RATING 20

CLASS PROTECTION I


SHADE CODE GL146

CABLE | CHAIN | BAR LENGT n/a

CABLE TYPE -

Fixing Bracket MLWB02 | Polished Chrome

* Fixing bracket may differ for UL wired products.

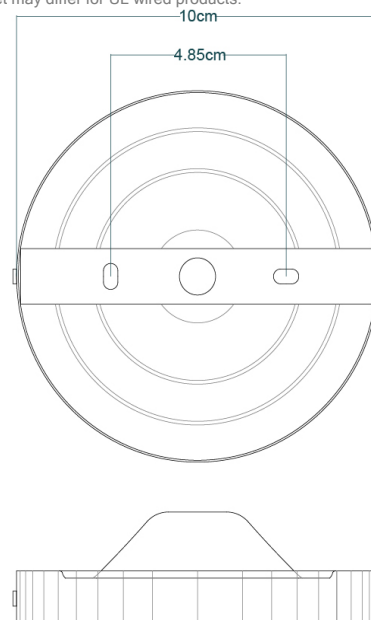


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

RIGALE Ceiling Light


MLCF15POLCOP Polished Copper

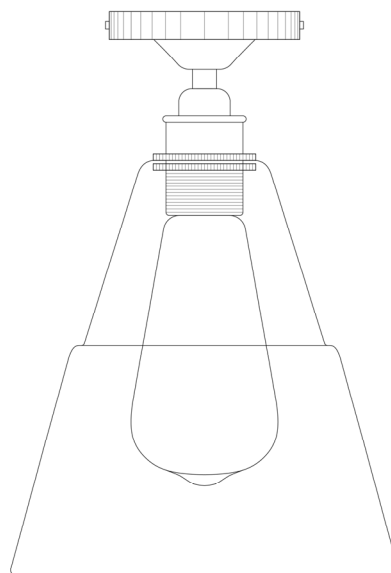

MATERIAL	Brass Copper Glass
HEIGHT	23cm 9.06"
WIDTH DIAMETER	18cm 7.09"
LENGTH PROJECTION	n/a
WEIGHT	0.7KG 1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	GL146
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB02 | Copper

* Fixing bracket may differ for UL wired products.

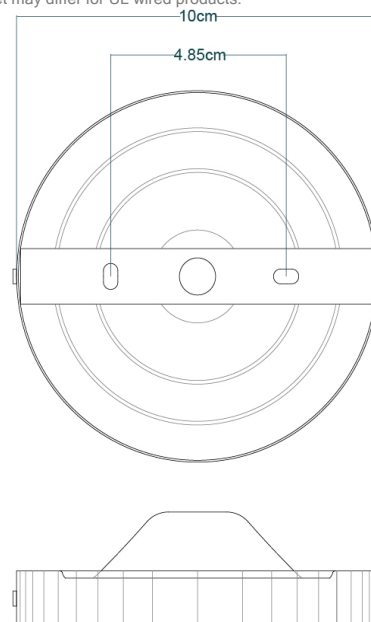


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

RIGALE Ceiling Light


MLCF15SATBRS Satin Brass

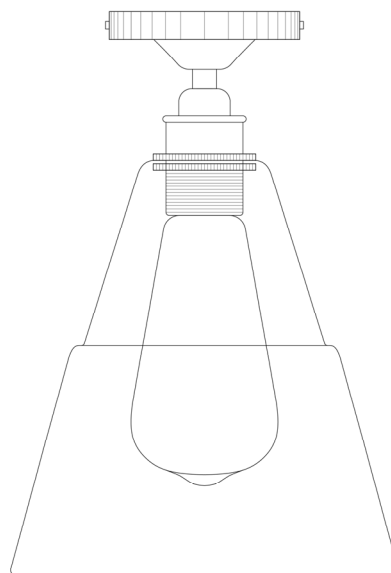

MATERIAL	Brass Glass
HEIGHT	23cm 9.06"
WIDTH DIAMETER	18cm 7.09"
LENGTH PROJECTION	n/a
WEIGHT	0.7KG 1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	GL146
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB02 | Satin Brass

* Fixing bracket may differ for UL wired products.

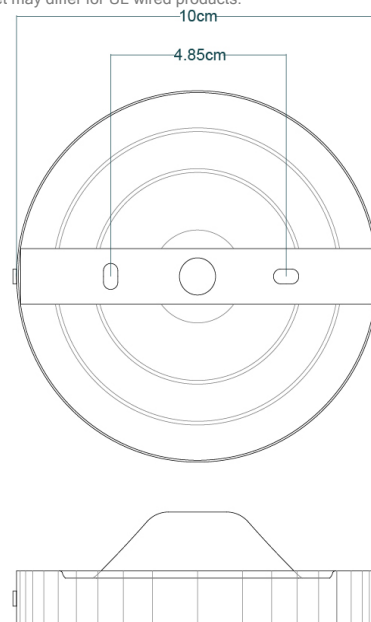

Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.