


MLCMTL004ANTBRS **Antique Brass**

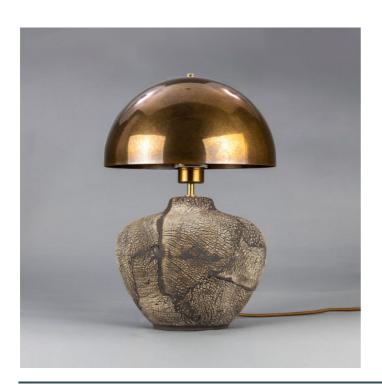

| MATERIAL | Brass |
|---------------------------|--|
| HEIGHT | 47cm 18.5" |
| WIDTH DIAMETER | 40cm 15.75" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 4.8KG 10.58lbs |
| LAMP HOLDER | E27 or E26 * |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v or 110/120v* |
| IP RATING | 20 |
| CLASS PROTECTION | II |
| SHADE CODE | - |
| CABLE CHAIN BAR LENGT | n/a |
| CABLE TYPE | MLCA047 2 Core Round Brown Braid PVC |

Fixing Bracket -

* Fixing bracket may differ for UL wired products.







Antique Silver MLCMTL004ANTSLV



| MATERIAL | Brass |
|---------------------------|--|
| HEIGHT | 47cm 18.5" |
| WIDTH DIAMETER | 40cm 15.75" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 4.8KG 10.58lbs |
| LAMP HOLDER | E27 or E26 * |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v or 110/120v* |
| IP RATING | 20 |
| CLASS PROTECTION | II |
| SHADE CODE | - |
| CABLE CHAIN BAR LENGT | n/a |
| CABLE TYPE | MLCA028 2 Core Round Black Braid PVC |

Fixing Bracket -

* Fixing bracket may differ for UL wired products.







MLCMTL004POLBRS

Polished Brass



| MATERIAL | Brass |
|---------------------------|--|
| HEIGHT | 47cm 18.5" |
| WIDTH DIAMETER | 40cm 15.75" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 4.8KG 10.58lbs |
| LAMP HOLDER | E27 or E26 * |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v or 110/120v* |
| IP RATING | 20 |
| CLASS PROTECTION | II |
| SHADE CODE | - |
| CABLE CHAIN BAR LENGT | n/a |
| CABLE TYPE | MLCA028 2 Core Round Black Braid PVC |

Fixing Bracket -

* Fixing bracket may differ for UL wired products.







MLCMTL004SATBRS Satin Brass



| MATERIAL | Brass |
|---------------------------|--|
| HEIGHT | 47cm 18.5'' |
| WIDTH DIAMETER | 40cm 15.75" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 4.8KG 10.58lbs |
| LAMP HOLDER | E27 or E26 * |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v or 110/120v* |
| IP RATING | 20 |
| CLASS PROTECTION | II |
| SHADE CODE | - |
| CABLE CHAIN BAR LENGT | n/a |
| CABLE TYPE | MLCA028 2 Core Round Black Braid PVC |

Fixing Bracket -

* Fixing bracket may differ for UL wired products.



