


SAKURA Ceramic Wall Light


MLCMWL044ANTBRS Antique Brass

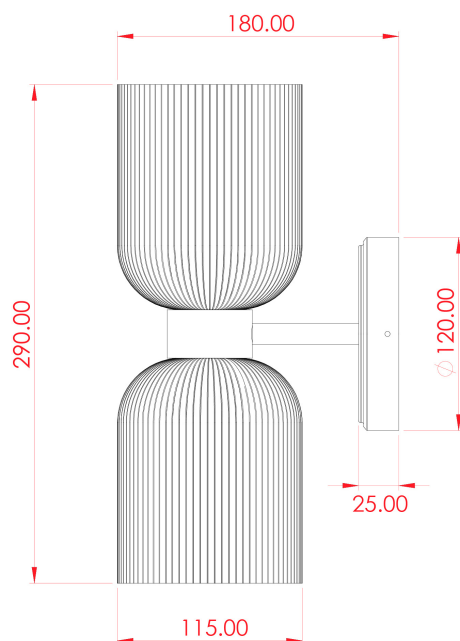

MATERIAL	Brass Ceramic
HEIGHT	29cm 11.42"
WIDTH DIAMETER	11cm 4.33"
LENGTH PROJECTION	18cm 7.09"
WEIGHT	2KG 4.41lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 2
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	MLCS076 x2
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB17| Antique Brass

* Fixing bracket may differ for UL wired products.

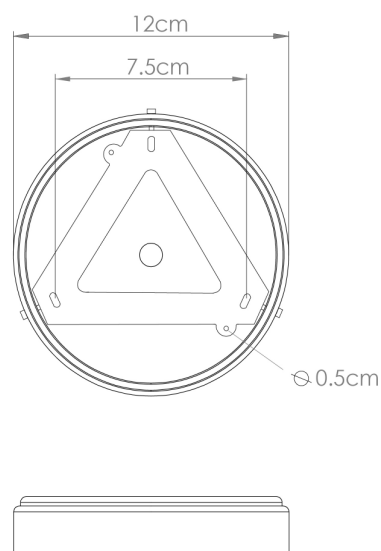


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

SAKURA Ceramic Wall Light


MLCMWL044ANTSLV Antique Silver

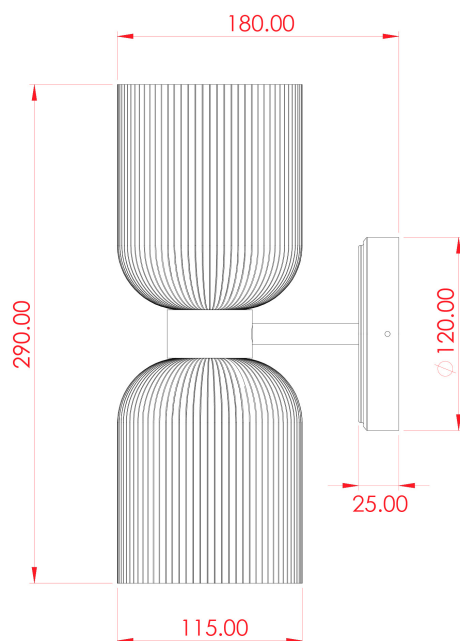

MATERIAL	Brass Ceramic
HEIGHT	29cm 11.42"
WIDTH DIAMETER	11cm 4.33"
LENGTH PROJECTION	18cm 7.09"
WEIGHT	2KG 4.41lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 2
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	MLCS076 x2
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB17| Antique Silver

* Fixing bracket may differ for UL wired products.

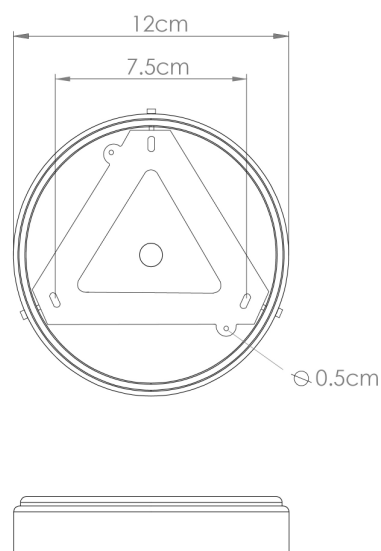


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.




SAKURA Ceramic Wall Light

MLCMWL044PCMBK Matt Black

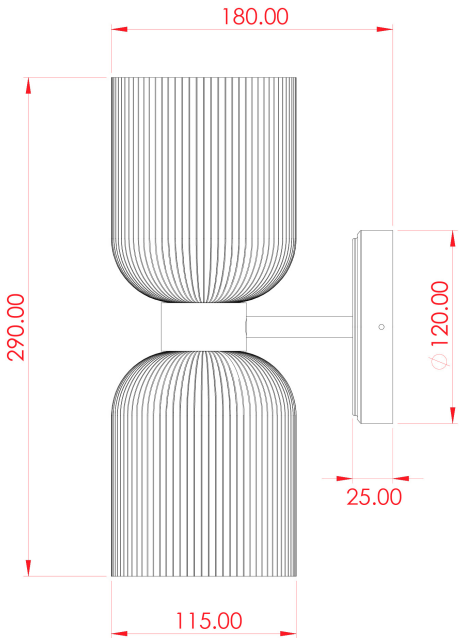


MATERIAL	Brass Ceramic
HEIGHT	29cm 11.42"
WIDTH DIAMETER	11cm 4.33"
LENGTH PROJECTION	18cm 7.09"
WEIGHT	2KG 4.41lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 2
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	MLCS076 x2
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB17
* Fixing bracket may differ for UL wired products.

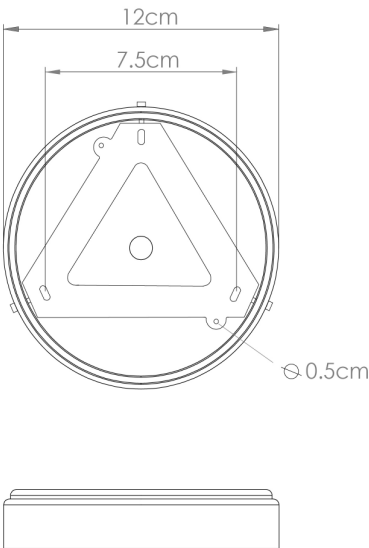


SAKURA Ceramic Wall Light

MLCMWL044POLBRS Polished Brass

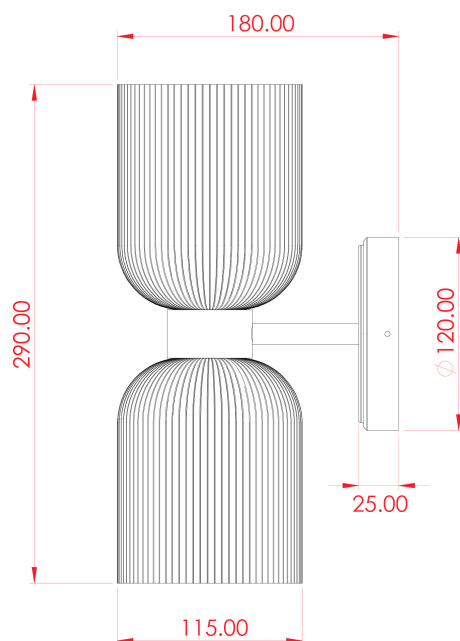

MATERIAL	Brass Ceramic
HEIGHT	29cm 11.42"
WIDTH DIAMETER	11cm 4.33"
LENGTH PROJECTION	18cm 7.09"
WEIGHT	2KG 4.41lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 2
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	MLCS076 x2
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB17| Polished Brass
* Fixing bracket may differ for UL wired products.

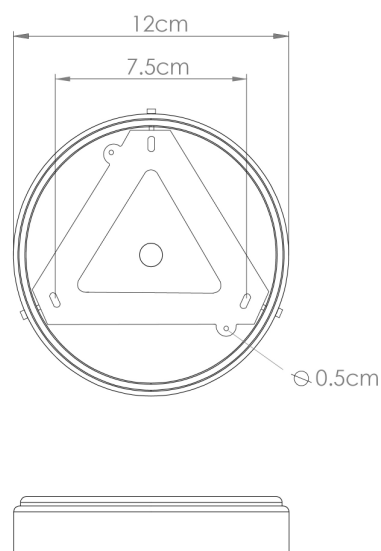


Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.



SAKURA Ceramic Wall Light

MLCMWL044SATBRS Satin Brass

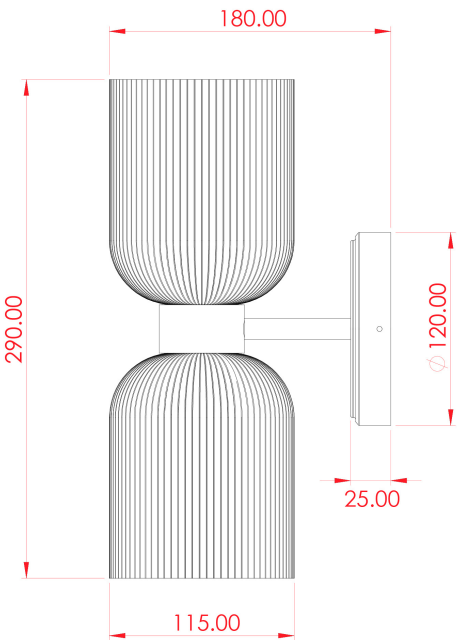

MATERIAL	Brass Ceramic
HEIGHT	29cm 11.42"
WIDTH DIAMETER	11cm 4.33"
LENGTH PROJECTION	18cm 7.09"
WEIGHT	2KG 4.41lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	40W x 2
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	MLCS076 x2
CABLE CHAIN BAR LENGT	n/a
CABLE TYPE	-

Fixing Bracket MLWB17| Satin Brass
* Fixing bracket may differ for UL wired products.

