
## **TOKYO** Chandelier

### MLF186ANTBRS Antique Brass





Brass	Fixing Bracket	MLWB17  Antique Brass
120cm   47.24"		. 12cm
110cm   43.31"		7.5cm
n/a		
16KG   35.27lbs		
E27 x 29		
40W x 29		
220/240v		
20		
I		
-		
100cm   40"		
MLCA036   3 Core Round   Brown   PVC		
	120cm   47.24" 110cm   43.31" n/a 16KG   35.27lbs E27 x 29 40W x 29 220/240v 20 1 100cm   40"	120cm  47.24" 110cm  43.31" n/a 16KG  35.27lbs E27 x 29 40W x 29 220/240v 2 1 - 100cm  40"

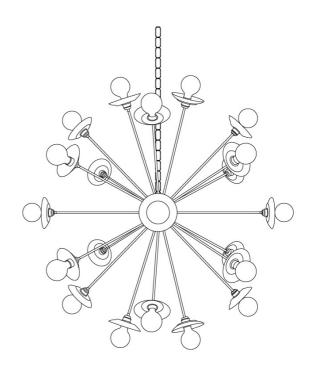

www.mullanlighting.com

Product Notes: 1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.




⊙0.5cm

## **TOKYO** Chandelier


#### **Antique Silver** MLF186ANTSLV



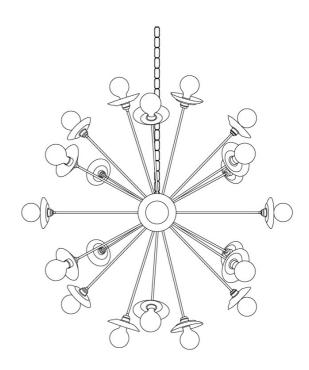

	MATERIAL	Brass	Fixing Bracket	MLWB17  Anti
	HEIGHT	120cm   47.24"		
	WIDTH   DIAMETER	110cm   43.31"		
	LENGTH   PROJECTION	n/a		
	WEIGHT	16KG   35.27lbs		S S
	LAMPHOLDER	E27 x 29		
	MAX WATTAGE	40W x 29		
	VOLTAGE	220/240v		
	IP RATING	20		
	CLASS PROTECTION	Ι		
	SHADE			
	FLEX   BAR   CHAIN LENGTH	100cm   40"		
	CABLE TYPE	MLCA013   3 Core Round   Clear   PVC		

#### ntique Silver





www.mullanlighting.com


Product Notes: 1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.



### **TOKYO Chandelier**

MLF186POLBRS Polished Brass



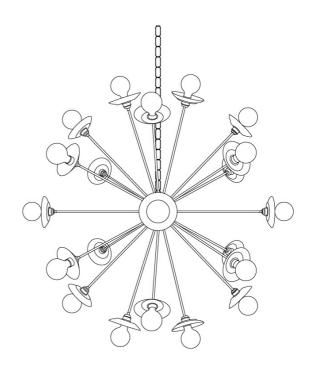

MATERIAL	Brass	Fixing Bracket	MLWB17  Polished Brass
HEIGHT	120cm   47.24"		12cm
WIDTH   DIAMETER	110cm   43.31"		7.5cm
LENGTH   PROJECTION	n/a		
WEIGHT	16KG   35.27lbs		
LAMPHOLDER	E27 x 29		
MAX WATTAGE	40W x 29		
VOLTAGE	220/240v		
IP RATING	20		
CLASS PROTECTION	Ι		
SHADE	-		
FLEX   BAR   CHAIN LENGTH	100cm   40"		
CABLE TYPE	MLCA012   3 Core Round   Gold   PVC		



www.mullanlighting.com

Product Notes: 1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.




⊙0.5cm

## **TOKYO** Chandelier


#### MLF186SATBRS Satin Brass



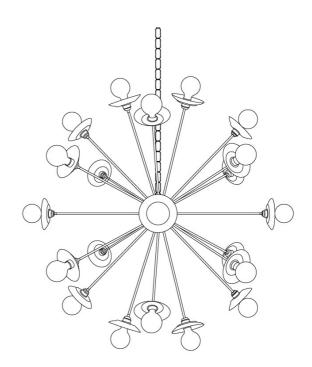

MATERIAL	Brass	Fixing Bracket	М
HEIGHT	120cm   47.24"		
WIDTH   DIAMETER	110cm   43.31"		
LENGTH   PROJECTION	n/a		
WEIGHT	16KG   35.27lbs		
LAMPHOLDER	E27 x 29		
MAX WATTAGE	40W x 29		
VOLTAGE	220/240v		9
IP RATING	20		
CLASS PROTECTION	1		
SHADE	-		Æ
FLEX   BAR   CHAIN LENGTH	100cm   40"		
CABLE TYPE	MLCA012   3 Core Round   Gold   PVC		

#### MLWB17| Satin Brass



EST. 2009 mullan

www.mullanlighting.com

Product Notes: Product Notes: 1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

