



# APOCH Wall Light

MLWL187ANTBRS Antique Brass

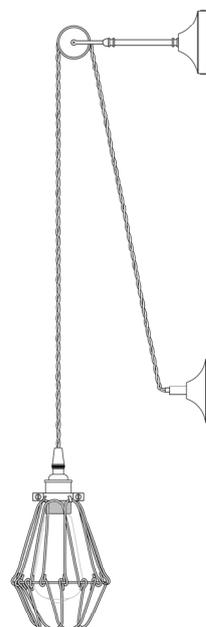

MATERIAL	Brass   Steel
HEIGHT	43-63cm   16.93-24.8"
WIDTH   DIAMETER	10cm   3.94"
LENGTH   PROJECTION	27.5cm   10.83"
WEIGHT	0.7KG   1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	MLCA007   3 Core Twist   Brown Braid   PVC

**Fixing Bracket MLWB03 | Antique Brass**  
 \* Fixing bracket may differ for UL wired products.

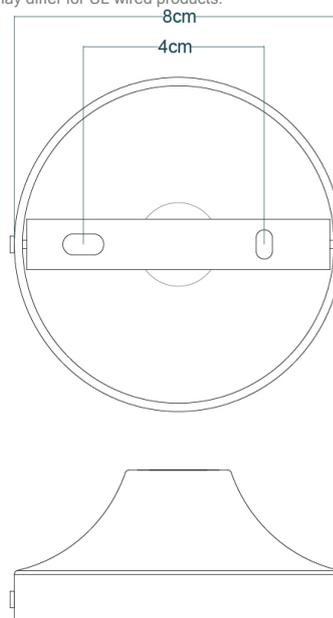


**Product Notes:**

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

## APOCH Wall Light


MLWL187ANTSLV Antique Silver

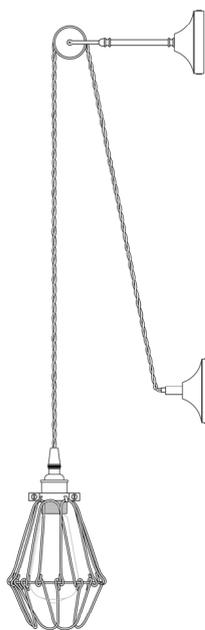

MATERIAL	Brass   Steel
HEIGHT	43-63cm   16.93-24.8"
WIDTH   DIAMETER	10cm   3.94"
LENGTH   PROJECTION	27.5cm   10.83"
WEIGHT	0.7KG   1.54lbs
LAMP HOLDER	E27 or E26 *
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE   CHAIN   BAR LENGT	n/a
CABLE TYPE	MLCA020   3 Core Twist   Black Braid   PVC

### Fixing Bracket MLWB03 | Antique Silver

\* Fixing bracket may differ for UL wired products.

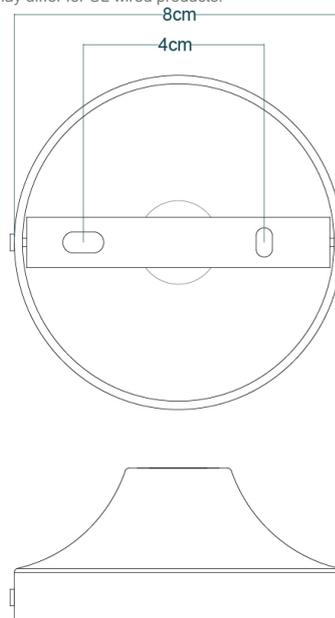

#### Product Notes:

1) Bulbs not included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.