




CALTRA Pendant

MLP423BLK Black



MATERIAL Brass | Porcelain

HEIGHT 10cm | 3.94"

WIDTH | DIAMETER 4.6cm | 1.81"

LENGTH | PROJECTION n/a

WEIGHT 1KG | 2.2lbs

LAMPHOLDER E27 or E26

MAX WATTAGE 60W x 1

VOLTAGE 220/240v or 110/120v

IP RATING 20

CLASS PROTECTION I


SHADE -

FLEX | BAR | CHAIN LENGT 100cm | 40"

CABLE TYPE MLCA028 | 2 Core Round | Black Braid | PVC

Fixing Bracket MLWB03 | Black

*For UL wired lights, fixing bracket may differ

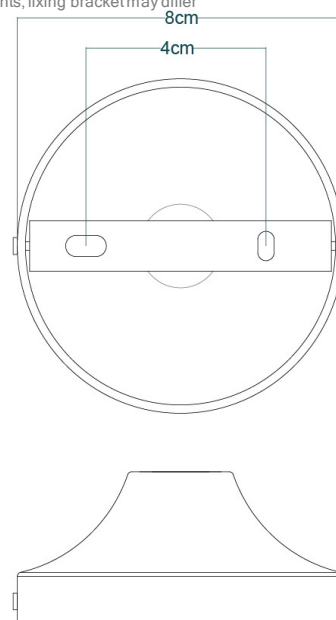

www.mullanlighting.com

Product Notes:


1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7) Dimensions do not include lamps. 8) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.





CALTRA Pendant

MLP423WTE White



MATERIAL Brass | Porcelain

HEIGHT 10cm | 3.94"

WIDTH | DIAMETER 4.6cm | 1.81"

LENGTH | PROJECTION n/a

WEIGHT 0.3KG | 0.66lbs

LAMPHOLDER E27 or E26

MAX WATTAGE 60W x 1

VOLTAGE 220/240v or 110/120v

IP RATING 20

CLASS PROTECTION I


SHADE -

FLEX | BAR | CHAIN LENGT 100cm | 40"

CABLE TYPE MLCA068 | 3 Core Round | White Braid | PVC

Fixing Bracket MLWB03 | White

*For UL wired lights, fixing bracket may differ

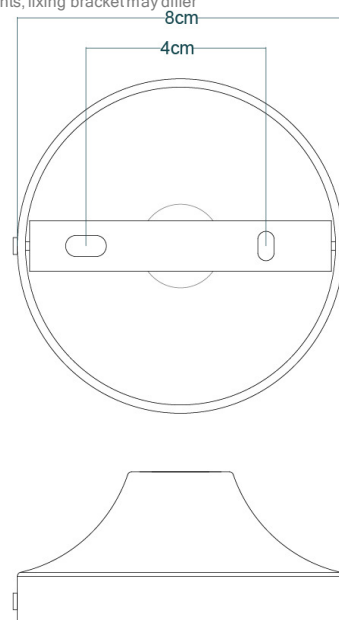

www.mullanlighting.com

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7) Dimensions do not include lamps. 8) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

