


# NEHIR Pendant


MLP484ANTBRS    Antique Brass

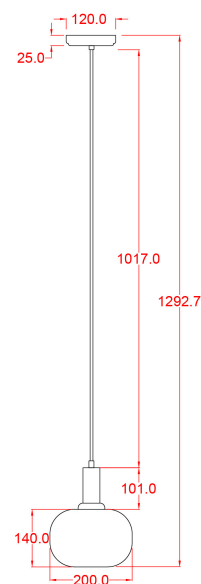

MATERIAL	Brass   Glass
HEIGHT	26cm   10.24"
WIDTH   DIAMETER	20cm   7.87"
LENGTH   PROJECTION	n/a
WEIGHT	1KG   2.2lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL194
FLEX   BAR   CHAIN LENGT	100cm   40"
CABLE TYPE	MLCA047   2 Core Round   Brown Braid   PVC

## Fixing Bracket MLROSE39

\*For UL wired lights, fixing bracket may differ

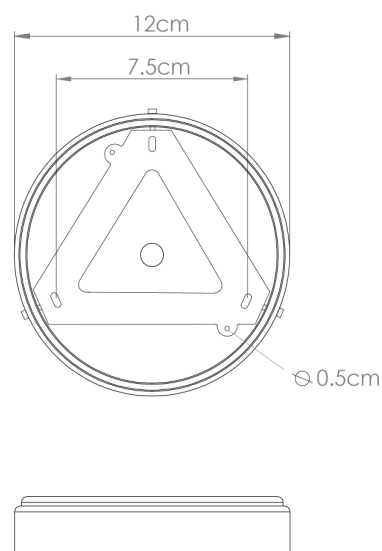


### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

# NEHIR Pendant


MLP484ANTSLV Antique Silver

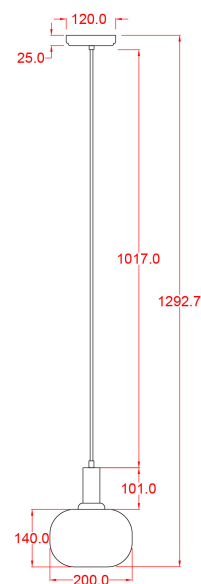

MATERIAL	Brass   Glass
HEIGHT	26cm   10.24"
WIDTH   DIAMETER	20cm   7.87"
LENGTH   PROJECTION	n/a
WEIGHT	1KG   2.2lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL194
FLEX   BAR   CHAIN LENGT	100cm   40"
CABLE TYPE	MLCA028   2 Core Round   Black Braid   PVC

## Fixing Bracket MLROSE39

\*For UL wired lights, fixing bracket may differ

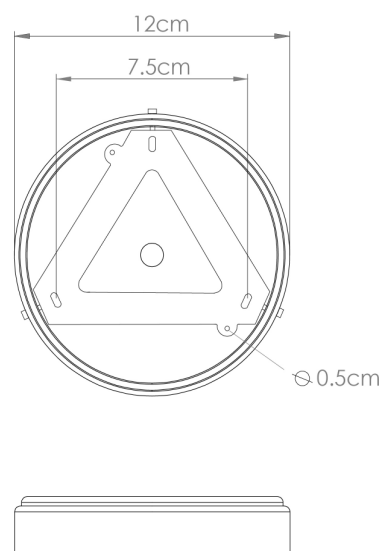


### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

## NEHIR Pendant


MLP484POLBRS Polished Brass

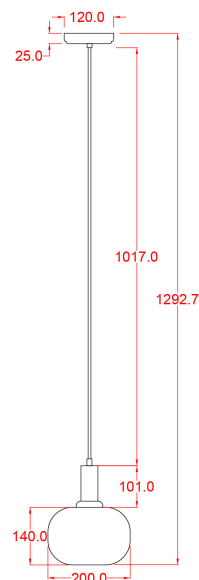

MATERIAL	Brass   Glass
HEIGHT	26cm   10.24"
WIDTH   DIAMETER	20cm   7.87"
LENGTH   PROJECTION	n/a
WEIGHT	1KG   2.2lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL194
FLEX   BAR   CHAIN LENGT	100cm   40"
CABLE TYPE	MLCA028   2 Core Round   Black Braid   PVC

### Fixing Bracket MLROSE39

\*For UL wired lights, fixing bracket may differ

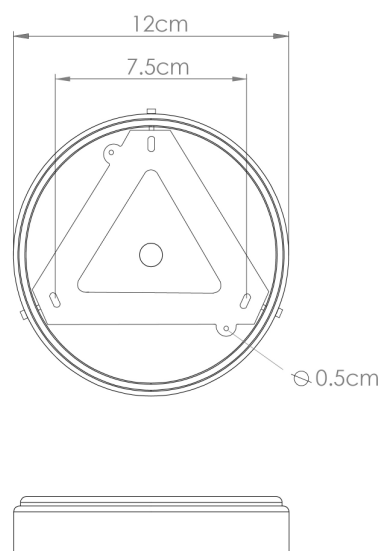


#### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

# NEHIR Pendant


MLP484SATBRS Satin Brass

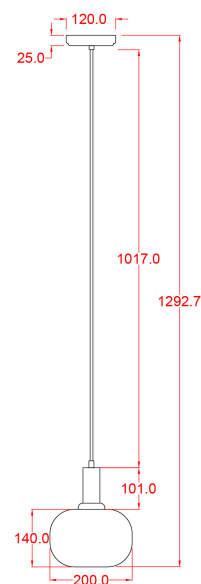

MATERIAL	Brass   Glass
HEIGHT	26cm   10.24"
WIDTH   DIAMETER	20cm   7.87"
LENGTH   PROJECTION	n/a
WEIGHT	1KG   2.2lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL194
FLEX   BAR   CHAIN LENGT	100cm   40"
CABLE TYPE	MLCA028   2 Core Round   Black Braid   PVC

## Fixing Bracket MLROSE39

\*For UL wired lights, fixing bracket may differ

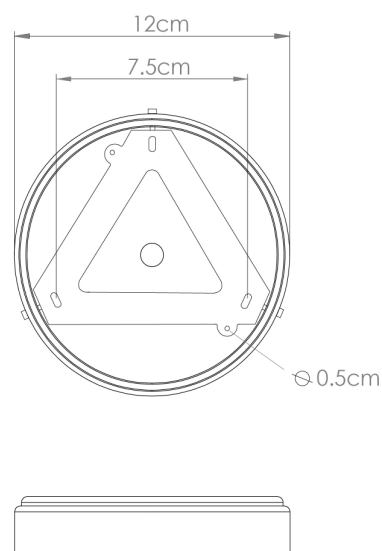

### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.