NEITH Pendant

MLP485ANTBRS Antique Brass

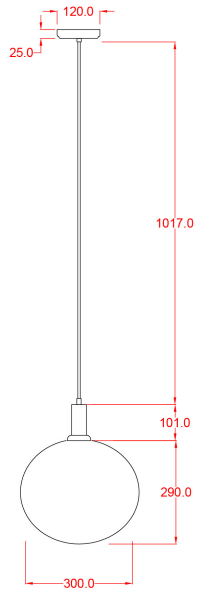

MATERIAL	Brass | Glass
HEIGHT	30cm | 11.81"
WIDTH | DIAMETER	30cm | 11.81"
LENGTH | PROJECTION	n/a
WEIGHT	1.5KG | 3.31lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL195
FLEX | BAR | CHAIN LENGT	100cm | 40"
CABLE TYPE	MLCA047 | 2 Core Round | Brown Braid | PVC

Fixing Bracket MLROSE39

*For UL wired lights, fixing bracket may differ

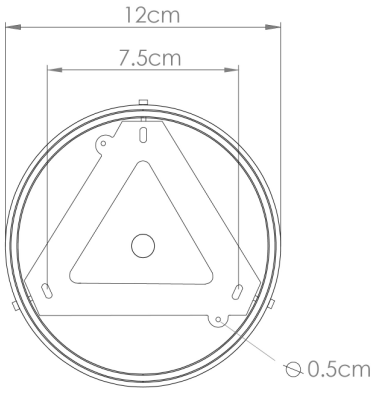

EST. 2009 mullan TAILOR-MADE

www.mullanlighting.com

Product Notes:
1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

NEITH Pendant

MLP485ANTSLV Antique Silver

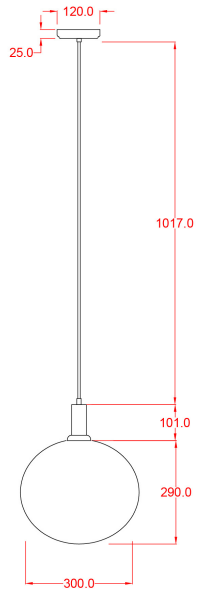

MATERIAL	Brass | Glass
HEIGHT	30cm | 11.81"
WIDTH | DIAMETER	30cm | 11.81"
LENGTH | PROJECTION	n/a
WEIGHT	1.5KG | 3.31lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL195
FLEX | BAR | CHAIN LENGT	100cm | 40"
CABLE TYPE	MLCA028 | 2 Core Round | Black Braid | PVC

Fixing Bracket MLROSE39

*For UL wired lights, fixing bracket may differ

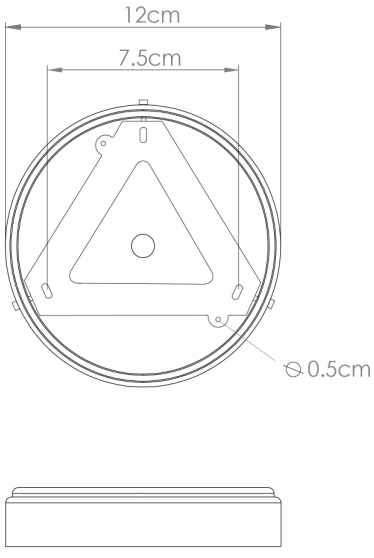

EST. 2009 mullan TAILOR-MADE

www.mullanlighting.com

Product Notes:
1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

NEITH Pendant

MLP485POLBRS Polished Brass

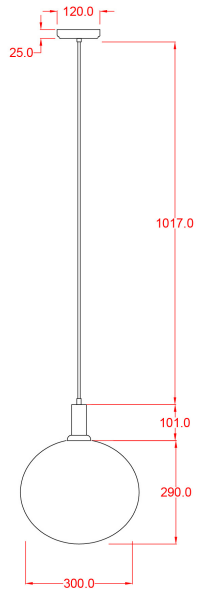

MATERIAL	Brass | Glass
HEIGHT	30cm | 11.81"
WIDTH | DIAMETER	30cm | 11.81"
LENGTH | PROJECTION	n/a
WEIGHT	1.5KG | 3.31lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL195
FLEX | BAR | CHAIN LENGT	100cm | 40"
CABLE TYPE	MLCA028 | 2 Core Round | Black Braid | PVC

Fixing Bracket MLROSE39

*For UL wired lights, fixing bracket may differ

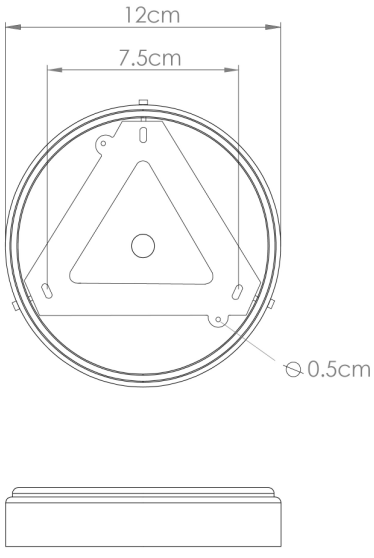

EST. 2009 mullan TAILOR-MADE

www.mullanlighting.com

Product Notes:
1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

NEITH Pendant

MLP485SATBRS Satin Brass

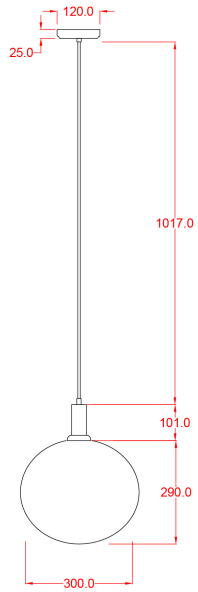

MATERIAL	Brass | Glass
HEIGHT	30cm | 11.81"
WIDTH | DIAMETER	30cm | 11.81"
LENGTH | PROJECTION	n/a
WEIGHT	1.5KG | 3.31lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	40W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	GL195
FLEX | BAR | CHAIN LENGT	100cm | 40"
CABLE TYPE	MLCA028 | 2 Core Round | Black Braid | PVC

Fixing Bracket MLROSE39

*For UL wired lights, fixing bracket may differ

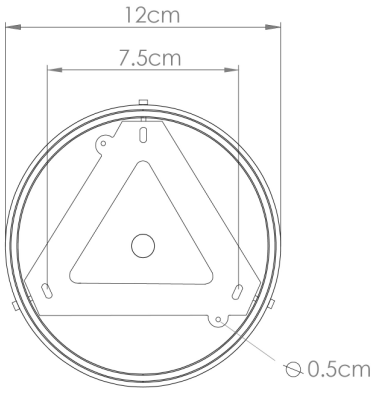

EST. 2009 mullan TAILOR-MADE

www.mullanlighting.com

Product Notes:
1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: http://www.mullanlighting.com/terms for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.