

KERRY Wall Light

MLWL433ANTBRS Antique Brass



MATERIAL Brass | Fabric

HEIGHT 26cm | 10.24"

WIDTH | DIAMETER 20-40cm | 7.87-15.75"

LENGTH | PROJECTION 34-54cm | 13.39-21.26"

WEIGHT 0.9KG | 1.98lbs

LAMPHOLDER E27 or E26

MAX WATTAGE 40W x 1

VOLTAGE 220/240v or 110/120v

IP RATING 20

CLASS PROTECTION I


SHADE MLFS002

FLEX | BAR | CHAIN LENGT n/a

CABLE TYPE -

Fixing Bracket MLWB17| Antique Brass

*For UL wired lights, fixing bracket may differ

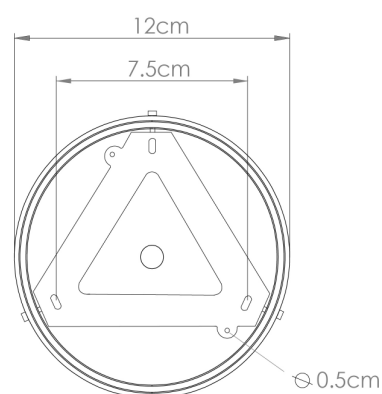

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

KERRY Wall Light


MLWL433NATBRS Natural Brass



| | |
|--------------------------|------------------------|
| MATERIAL | Brass Fabric |
| HEIGHT | 26cm 10.24" |
| WIDTH DIAMETER | 20-40cm 7.87-15.75" |
| LENGTH PROJECTION | 34-54cm 13.39-21.26" |
| WEIGHT | 0.9KG 1.98lbs |
| LAMPHOLDER | E27 or E26 |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v or 110/120v |
| IP RATING | 20 |
| CLASS PROTECTION | I |
| SHADE | MLFS002 |
| FLEX BAR CHAIN LENGT | n/a |
| CABLE TYPE | - |

Fixing Bracket MLWB17| Natural Brass

*For UL wired lights, fixing bracket may differ

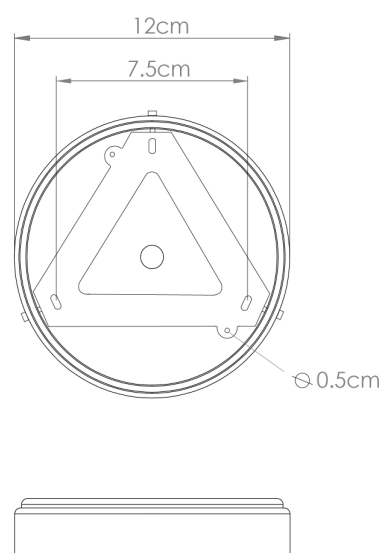

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.