


DALAT Pendant

MLP414ANTBRS Antique Brass

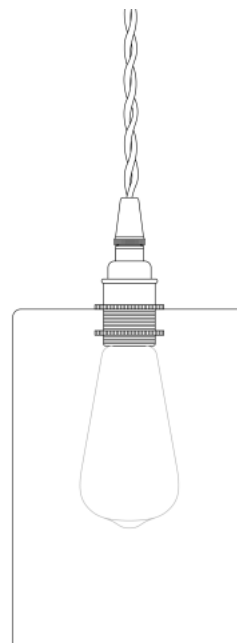

| | |
|--------------------------|--|
| MATERIAL | Brass Glass |
| HEIGHT | 20cm 7.87" |
| WIDTH DIAMETER | 14cm 5.51" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 0.94KG 2.07lbs |
| LAMPHOLDER | E27 x 1 |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v |
| IP RATING | 20 |
| CLASS PROTECTION | I |
| SHADE | GL163 |
| FLEX BAR CHAIN LENGT | 100cm 40" |
| CABLE TYPE | MLCA007 3 Core Twist Brown Braid PVC |


Fixing Bracket MLROSE05GRIP | Antique Brass

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

DALAT Pendant

MLP414ANTSLV Antique Silver

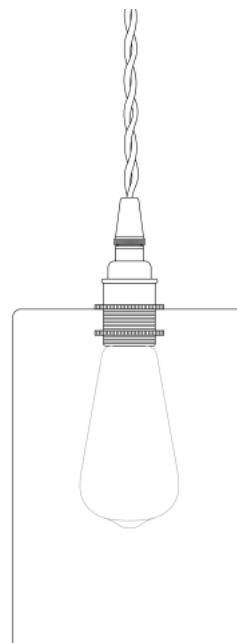

| | |
|--------------------------|--|
| MATERIAL | Brass Glass |
| HEIGHT | 20cm 7.87" |
| WIDTH DIAMETER | 14cm 5.51" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 0.94KG 2.07lbs |
| LAMPHOLDER | E27 x 1 |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v |
| IP RATING | 20 |
| CLASS PROTECTION | I |
| SHADE | GL163 |
| FLEX BAR CHAIN LENGT | 100cm 40" |
| CABLE TYPE | MLCA020 3 Core Twist Black Braid PVC |


Fixing Bracket MLROSE05GRIP | Antique Silver

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

DALAT Pendant

MLP414POLBRS Polished Brass

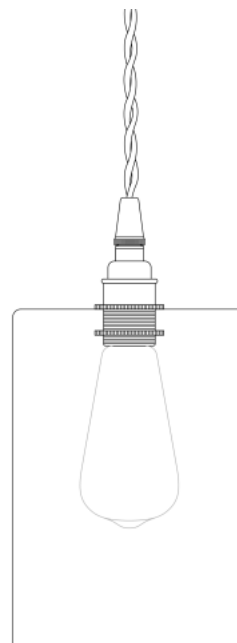

| | |
|--------------------------|--|
| MATERIAL | Brass Glass |
| HEIGHT | 20cm 7.87" |
| WIDTH DIAMETER | 14cm 5.51" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 0.94KG 2.07lbs |
| LAMPHOLDER | E27 x 1 |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v |
| IP RATING | 20 |
| CLASS PROTECTION | I |
| SHADE | GL163 |
| FLEX BAR CHAIN LENGT | 100cm 40" |
| CABLE TYPE | MLCA020 3 Core Twist Black Braid PVC |


Fixing Bracket MLROSE05GRIP | Polished Brass

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

DALAT Pendant

MLP414SATBRS Satin Brass

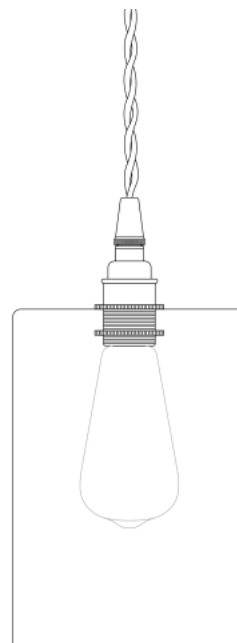

| | |
|--------------------------|--|
| MATERIAL | Brass Glass |
| HEIGHT | 20cm 7.87" |
| WIDTH DIAMETER | 14cm 5.51" |
| LENGTH PROJECTION | n/a |
| WEIGHT | 0.94KG 2.07lbs |
| LAMPHOLDER | E27 x 1 |
| MAX WATTAGE | 40W x 1 |
| VOLTAGE | 220/240v |
| IP RATING | 20 |
| CLASS PROTECTION | I |
| SHADE | GL163 |
| FLEX BAR CHAIN LENGT | 100cm 40" |
| CABLE TYPE | MLCA020 3 Core Twist Black Braid PVC |

Fixing Bracket MLROSE05GRIP | Satin Brass

Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.