


## REHAU Wall Light


MLWL193ANTBRS Antique Brass

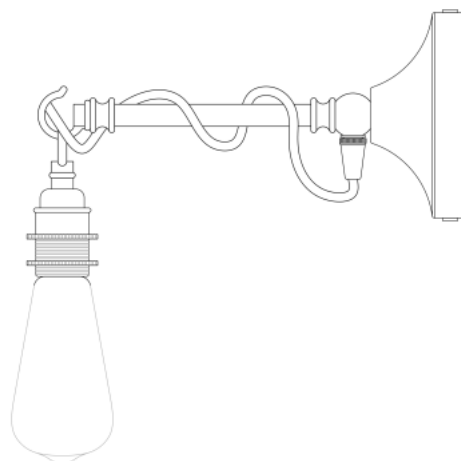

MATERIAL	Brass
HEIGHT	12cm   4.72"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	19cm   7.48"
WEIGHT	0.4KG   0.88lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA007   3 Core Twist   Brown Braid   PVC

### Fixing Bracket MLWB03 | Antique Brass

\*For UL wired lights, fixing bracket may differ

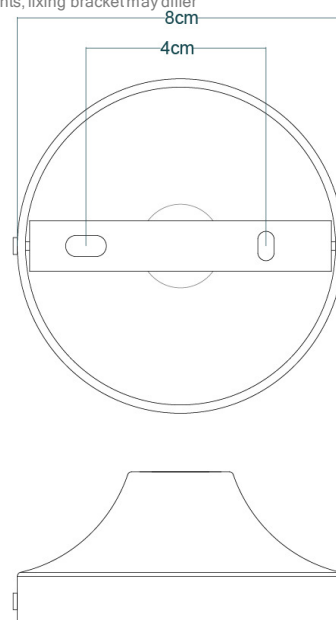


#### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

## REHAU Wall Light


MLWL193ANTSLV Antique Silver

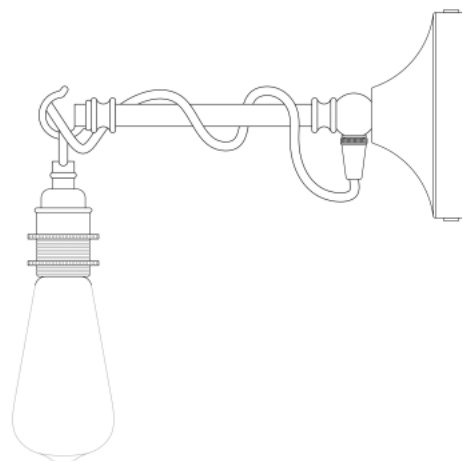

MATERIAL	Brass
HEIGHT	12cm   4.72"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	19cm   7.48"
WEIGHT	0.4KG   0.88lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA020   3 Core Twist   Black Braid   PVC

### Fixing Bracket MLWB03 | Antique Silver

\*For UL wired lights, fixing bracket may differ

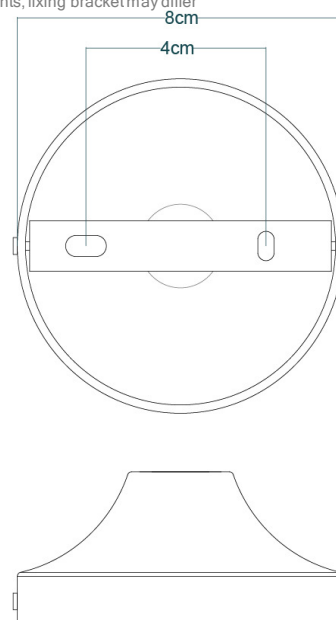


#### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

# REHAU Wall Light


MLWL193POLBRS Polished Brass

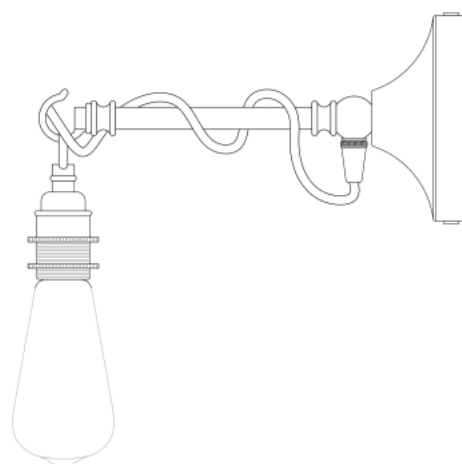

MATERIAL	Brass
HEIGHT	12cm   4.72"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	19cm   7.48"
WEIGHT	0.4KG   0.88lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA020   3 Core Twist   Black Braid   PVC

## Fixing Bracket MLWB03 | Polished Brass

\*For UL wired lights, fixing bracket may differ

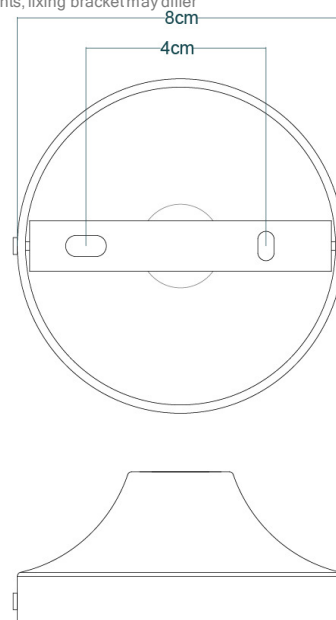


### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.

# REHAU Wall Light


MLWL193SATBRS Satin Brass

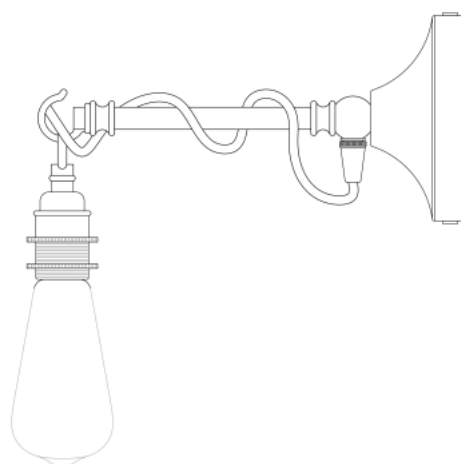

MATERIAL	Brass
HEIGHT	12cm   4.72"
WIDTH   DIAMETER	8cm   3.15"
LENGTH   PROJECTION	19cm   7.48"
WEIGHT	0.4KG   0.88lbs
LAMPHOLDER	E27 or E26
MAX WATTAGE	60W x 1
VOLTAGE	220/240v or 110/120v
IP RATING	20
CLASS PROTECTION	I
SHADE	-
FLEX   BAR   CHAIN LENGT	n/a
CABLE TYPE	MLCA020   3 Core Twist   Black Braid   PVC

## Fixing Bracket MLWB03 | Satin Brass

\*For UL wired lights, fixing bracket may differ

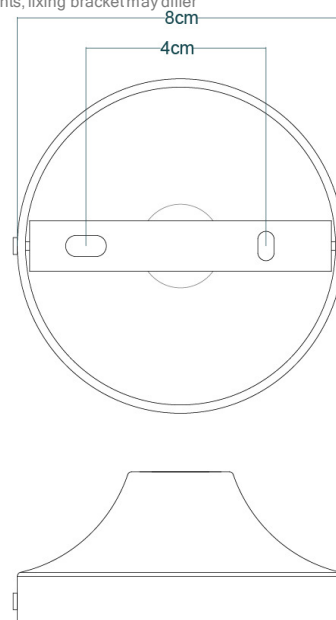

### Product Notes:

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.