

# Dali LED Drivers

## DALI 2 + Push AC Phase Cut Dimmer

200W

### Product features:

- AC phase cut dimmer with both DALI and push switch control interface
- 100-240VAC Wide Input and Output Voltage
- 1 DALI address to control 1 Channel Output, up to 200W
- Input and Output with Screw Terminals, Safe and Reliable
- Trailing edge dimming, supports resistive loads and capacitive loads
- Innovative minimum brightness setting function
- Single Wire Push Switch Input for Push Dim Function
- Great Compatibility with Universal 8V-230V ~ Input Push Switches
- Complies to DALI standards IEC 62386-102, IEC 62386-207
- Compatible with universal DALI systems and master controllers in the market
- To dim and switch single colour dimmable LED lamps, traditional incandescent and halogen lights
- Mini Size, Easy to be installed into a standard 86x86mm wall box
- Waterproof grade: IP20

### Safety & Warnings:

- DO NOT install with power applied to device
- DO NOT expose the device to moisture

## HTI SR2303SAC-HP

200W

### General


Colour	White
Construction	Plastic
Dimmable	Yes
IP Rating	IP20

### Dimensions

Height	20.3mm
Length	45.5mm
Width	45mm


### Electrical

Maximum Wattage	200W
Voltage	240V

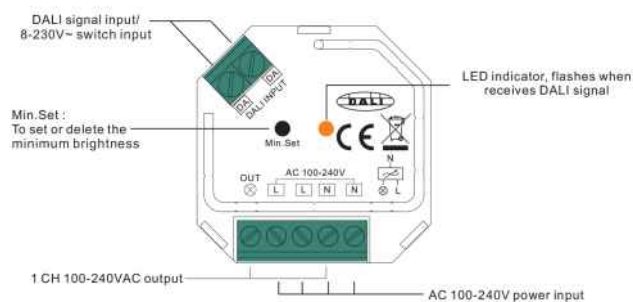


### Wiring diagram

(1) With DALI Signal

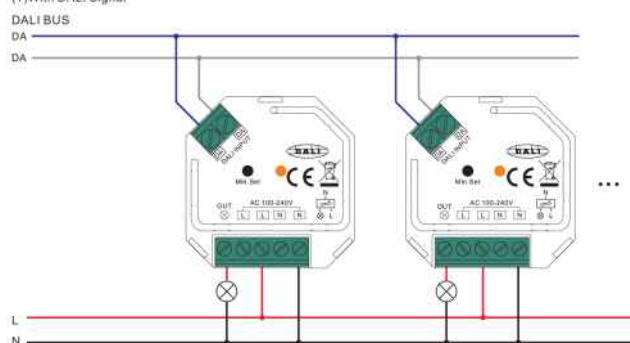

Dali LED Drivers  
DALI 2 + Push AC Phase Cut Dimmer  
200W

(2)With AC Push Switch

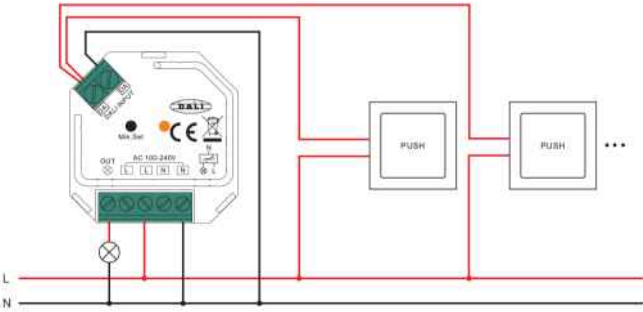

(3)With Push LV

